



veco

BY AWEX

TERMÉKKATALÓGUS



Az AVECO Európa egyik vezető, professzionális biztonsági világítási és tűzvédelmi rendszereket gyártó AWEX márkacsoport része.

Az AVECO azért jött létre, hogy kiszolgálja azokat a feltörekvő piacokat, amelyek bizonyított minőséget, gyors termékelérhetőséget és rendkívül versenyképes árakat igényelnek. Az AVECO termékeket Lengyelországban tervezik és gyártják, az európai szabványoknak megfelelően, minden műszaki és minőségi előírásnak megfelelnek. A teljes fejlesztési folyamatot az AWEX mérnökei felügyelik.

Az AVECO termékek ideális választást jelentenek kereskedelmi projektekhez és nagy volumenű beruházásokhoz, ahol alapvető elvárás a nagy mennyiségben rendelhető termék, a gyors szállítás és a költséghatékonyság. A standard termékkínálat azonnal elérhető raktárról, egyszerűen telepíthető és rendkívül sokoldalúan használható, így jelentősen megkönnyíti a projektmegvalósulást.

Az AWEX stratégiáján belül gazdaságos márkaként működő AVECO lehetővé teszi, hogy a vállalat gyorsan és rugalmasan reagáljon a különböző piacok igényeire, miközben teljes mértékben megfelel a gyártási és műszaki előírásoknak, valamint biztosítja a nemzetközi értékesítési elérhetőséget. Az AVECO megbízható partnert jelent a beruházók és a forgalmazók számára, egyszerű, hatékony és bizonyítottan jól működő megoldásokat kínálva, amelyek valós piaci igényekhez igazodnak.



B Y A W E X

MEGBÍZHATÓ PARTNERED



Lengyel gyártás – minden terméket Lengyelországban terveznek és gyártanak, az európai szabványoknak megfelelően.



Szabályozási megfelelés – teljes körű tanúsítással és a vonatkozó műszaki előírások betartásával.



Bizonyított minőség – az AWEX szakemberei által biztosított technológiai és mérnöki felügyelet.

3



Nagy volumenű megoldások – ideálisak nagy projektekhez és skálázható beruházásokhoz.



Elérhető raktárkészlet – katalógustermékek azonnali szállításra és telepítésre készen.



Nemzetközi jelenlét – a kínálat az eltérő nemzetközi piacok igényeihez igazodik.




Egyszerű telepítés – jól átgondolt műszaki megoldások a gyors és könnyű szerelésért.



Versenyképes árak – költséghatékony ajánlat, megbízhatósági kompromisszumok nélkül.





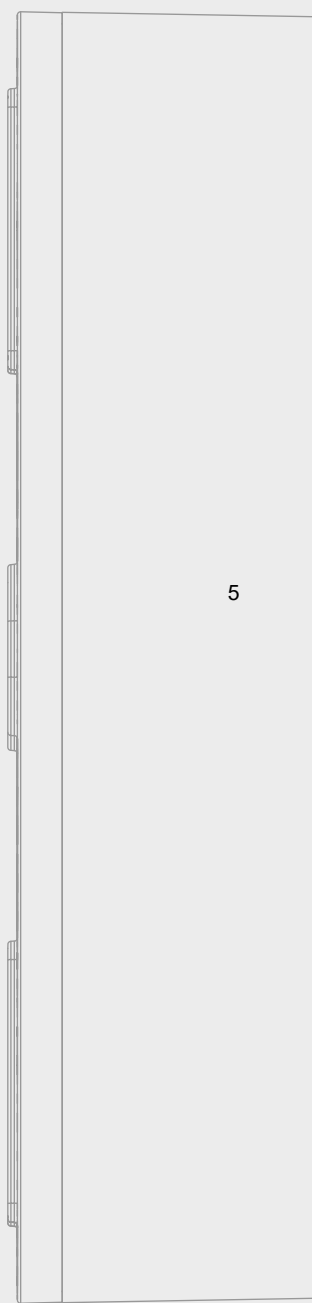

AXN

EMERGENCY
ESCAPE LIGHTING

AC
220-240V
50/60Hz

IP65

IK08


LED



6



DIMENSIONS [mm]

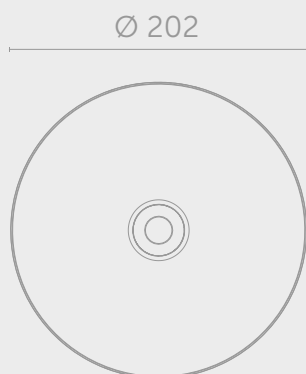

TECHNICAL DATA

MATERIALS	White polycarbonate body
MOUNTING	Surface
POWER SUPPLY	Self contained – 220 - 240VAC - 50/60Hz
LIGHT SOURCE	1W LED OPTICS: O – open area • C – corridor COLOUR TEMPERATURE: 6000K LIFETIME: 50000h
CHARGING	Max. 24h
AUTONOMY AND BATTERIES	3h, Ni-Cd 3,6V batteries
INSULATION CLASS	II
IP & IK RATING	IP65 • IK08
AMBIENT TEMPERATURE	Self-contained: t_a : 0°C ÷ 40°C
OPTIONS	SE – non maintained • AT – autotest
ADDITIONAL INFORMATION	LED indicator signalizes mains power supply and battery charge • Deep discharge protection

7

CODE	POWER	MODULE	AUTONOMY [h]	MODE	OPTION
AXNO	1W	E1	3	SE	X
AXNO	1W	E1	3	SE	AT
AXNC	1W	E1	3	SE	X
AXNC	1W	E1	3	SE	AT

LEGEND

OPTICS

AXNO fixture AXNI with optics for open area
AXNC fixture AXNI with optics for corridor

MODULE

E1 electronic gear for self-contained fittings

MODE

SE non maintained

OPTION


X fitting without additional options
AT autotest

AXP

EMERGENCY
ESCAPE LIGHTING

8



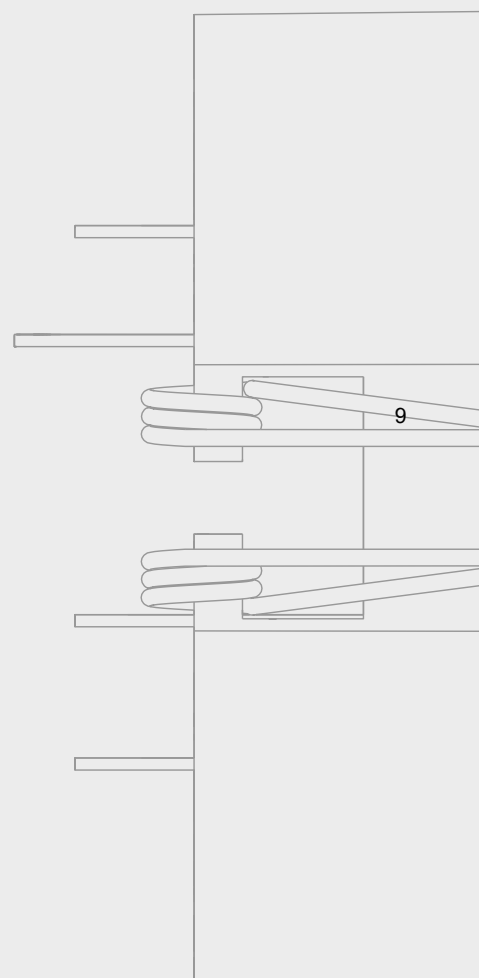

AXP

EMERGENCY
ESCAPE LIGHTING

AC
220-240V
50/60Hz

IP65/20


IK08

LED



10

DIMENSIONS [mm]

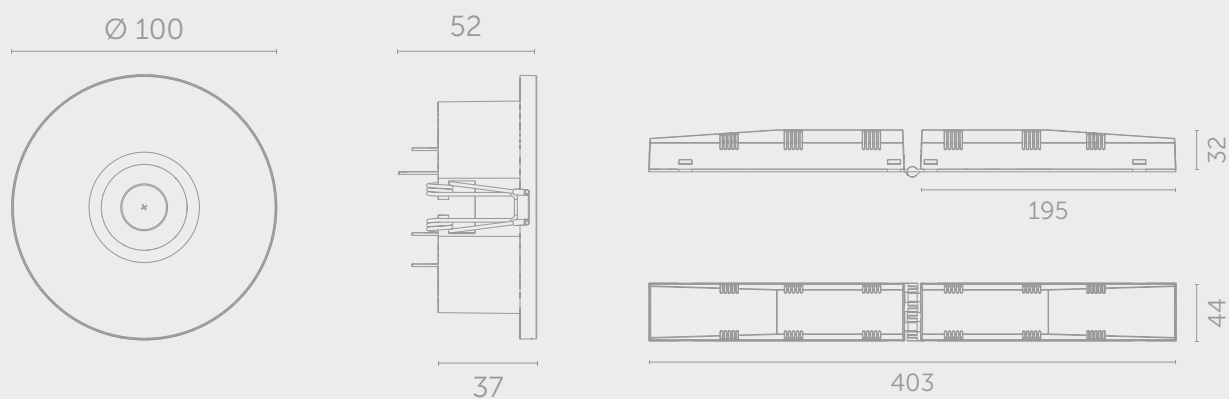

TECHNICAL DATA

MATERIALS	White polycarbonate body
MOUNTING	Recessed
POWER SUPPLY	Self contained – 220 - 240VAC - 50/60Hz
LIGHT SOURCE	1W LED OPTICS: O – open area • C – corridor COLOUR TEMPERATURE: 6000K LIFETIME: 50000h
CHARGING	Max. 24h
AUTONOMY AND BATTERIES	3h, Ni-Cd 3,6V batteries
INSULATION CLASS	II
IP & IK RATING	IP65/20 • IK08
AMBIENT TEMPERATURE	Self-contained: t_a : 0°C ÷ 40°C
OPTIONS	SE – non maintained • AT – autotest
ADDITIONAL INFORMATION	LED indicator signalizes mains power supply and battery charge • Deep discharge protection

11

CODE	POWER	MODULE	AUTONOMY [h]	MODE	OPTION
AXPO	1W	E1	3	SE	X
AXPO	1W	E1	3	SE	AT
AXPC	1W	E1	3	SE	X
AXPC	1W	E1	3	SE	AT

LEGEND

OPTICS

AXPO fixture LOVATO P with optics for open area
AXPC fixture LOVATO P with optics for corridor

MODULE

E1 electronic gear for self-contained fittings

MODE

SE non maintained


OPTION

X fitting without additional options
AT autotest

EXIT S

EMERGENCY
EXIT LIGHTING



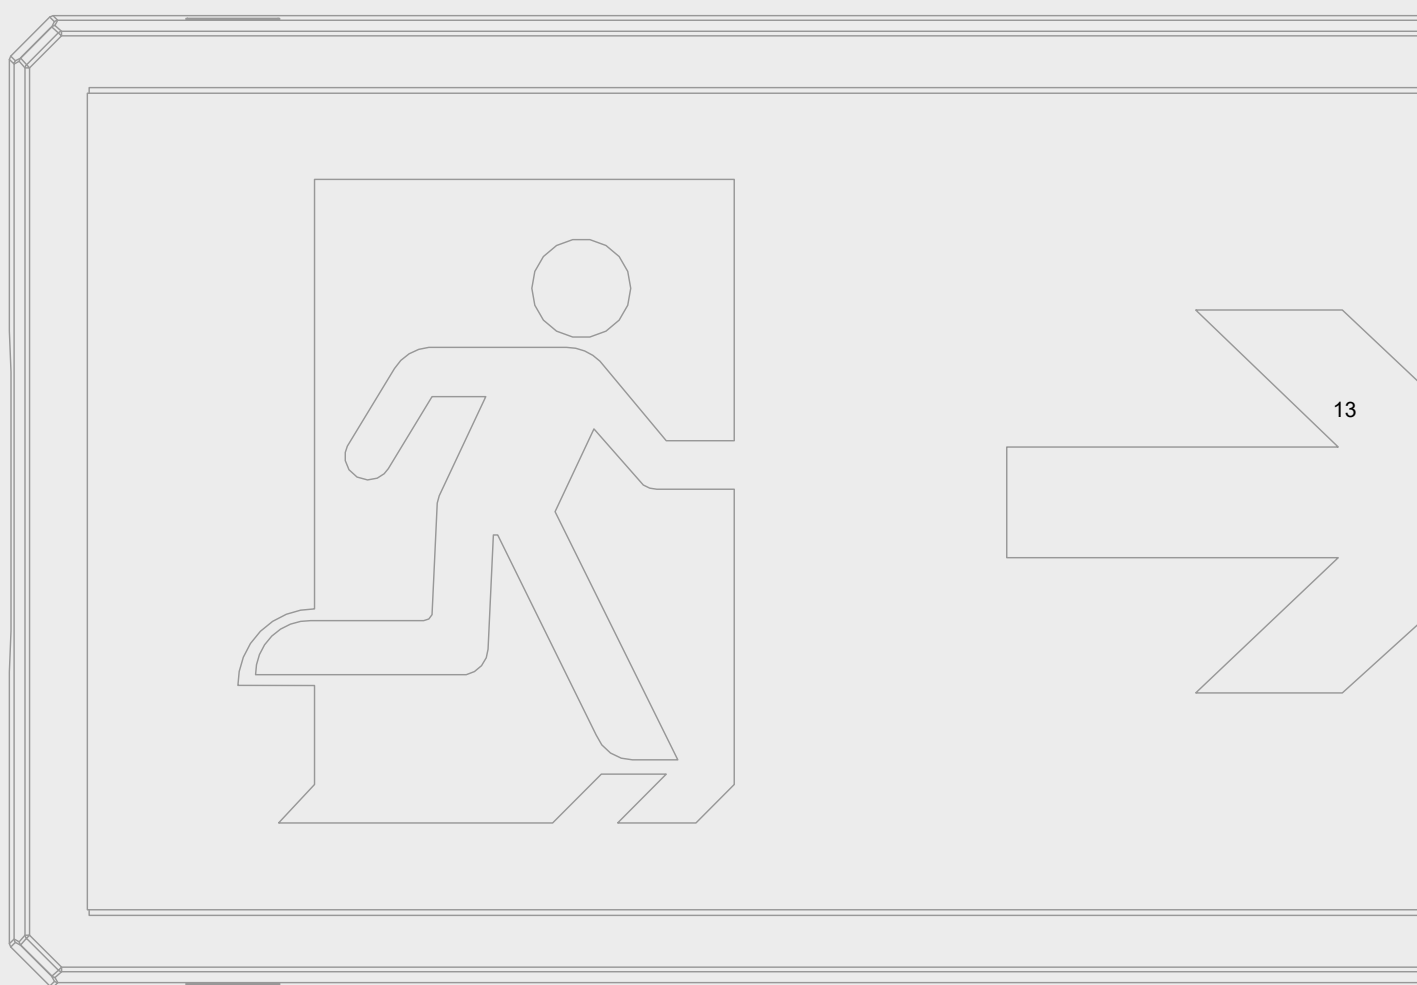

EXIT S

EMERGENCY
EXIT LIGHTING

AC
220-240V
50/60Hz

IP65

IK10

LED



Ni-Cd




d=20m



14

DIMENSIONS [mm]

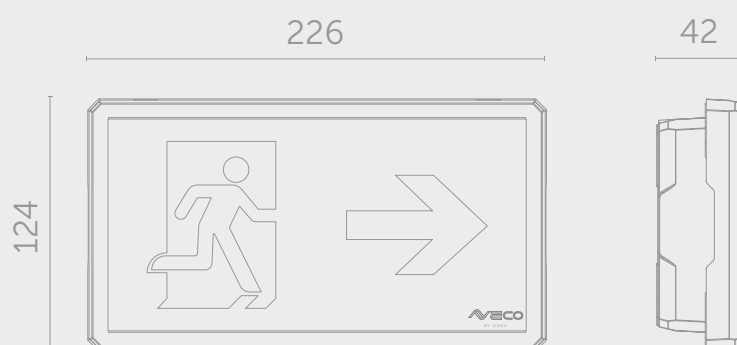

TECHNICAL DATA

MATERIALS	White polycarbonate body
MOUNTING	Surface
POWER SUPPLY	Self contained – 220 - 240VAC - 50/60Hz
LIGHT SOURCE	1W LED COLOUR TEMPERATURE: 6000K LIFETIME: 50000h
CHARGING	Max. 24h
AUTONOMY AND BATTERIES	3h, Ni-Cd 3,6V batteries
INSULATION CLASS	II
IP & IK RATING	IP65 • IK10
VIEWING DISTANCE	20 m
VIEWING METHOD	Single-sided or double-sided
AMBIENT TEMPERATURE	Self-contained: t_a : 0°C ÷ 40°C
OPTIONS	SE – non maintained • SA – maintained • AT – autotest
ADDITIONAL INFORMATION	LED indicator signalizes mains power supply and battery charge • Deep discharge protection

15

CODE	POWER	MODULE	AUTONOMY [h]	MODE	OPTION
ETS	1W	E1	3	SE	X
ETS	1W	E1	3	SE	AT
ETS	1W	C1	3	SA	X
ETS	1W	C1	3	SA	AT

LEGEND

MODULE

E1, C1 electronic gear for
self-contained fittings

MODE

SE non maintained
SA maintained

OPTION

X fitting without additional options
AT autotest

EXIT S PLEXI GLASS


EXIT S
ACCESSORIES

CODE: ETS/PLX



16

DIMENSIONS [mm]

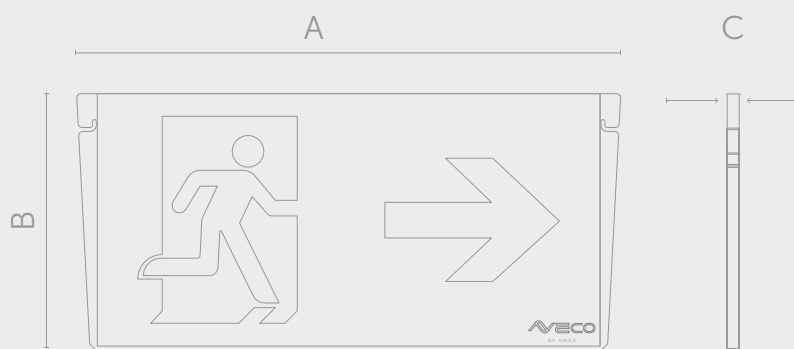

AxBxC
224x107x6

FITS TO EXIT S




17

ARROW N

EMERGENCY
EXIT LIGHTING



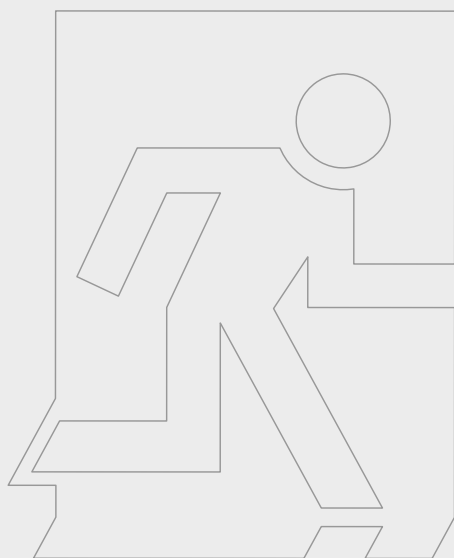

ARROW N

EMERGENCY
EXIT LIGHTING

AC
220-240V
50/60Hz

IP40

IK08

LED




d=25m



20

DIMENSIONS [mm]

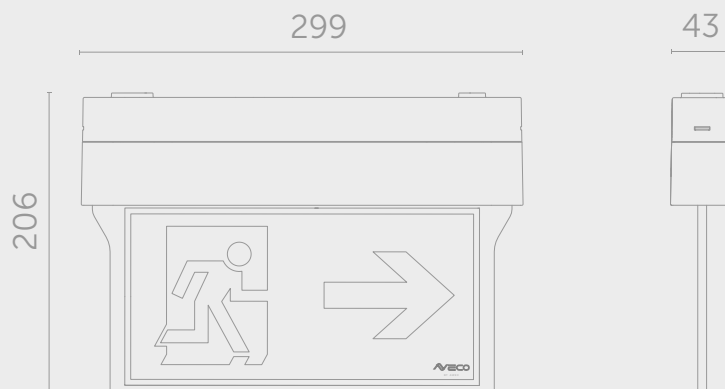

TECHNICAL DATA

MATERIALS	White polycarbonate body
MOUNTING	Surface
POWER SUPPLY	Self contained – 220 - 240VAC - 50/60Hz
LIGHT SOURCE	1W LED COLOUR TEMPERATURE: 6000K LIFETIME: 50000h
CHARGING	Max. 24h
AUTONOMY AND BATTERIES	3h, Ni-Cd 3,6V batteries
INSULATION CLASS	II
IP & IK RATING	IP40 • IK08
VIEWING DISTANCE	25 m
VIEWING METHOD	Double-sided
AMBIENT TEMPERATURE	Self-contained: t_a : 0°C ÷ 40°C
OPTIONS	SA – maintained • AT – autotest
ADDITIONAL INFORMATION	LED indicator signalizes mains power supply and battery charge • Deep discharge protection

21

CODE	POWER	MODULE	AUTONOMY [h]	MODE	OPTION
ARN	1W	C1	3	SA	X
ARN	1W	C1	3	SA	AT

LEGEND

MODULE	
C1	electronic gear for self-contained fittings
MODE	
SA	maintained
OPTION	
X	fitting without additional options
AT	autotest

LUMENTRON ELECTRONIC KFT.

1025 Budapest, Szépvölgyi út 146.

Tel: +36 30 636-2861

E-mail: lumentron@lumentron.eu

