


MX family



MX family

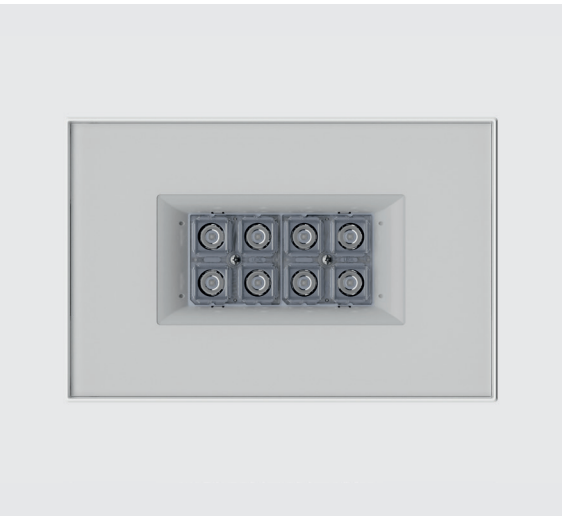


MX

p. 42

Durability and efficiency


MX range is waterproof and has high impact resistance and can be installed in the most tough conditions. Main application of the MX fixture are double-height areas, due to high power, high efficiency and innovative optics for escape router and open spaces.

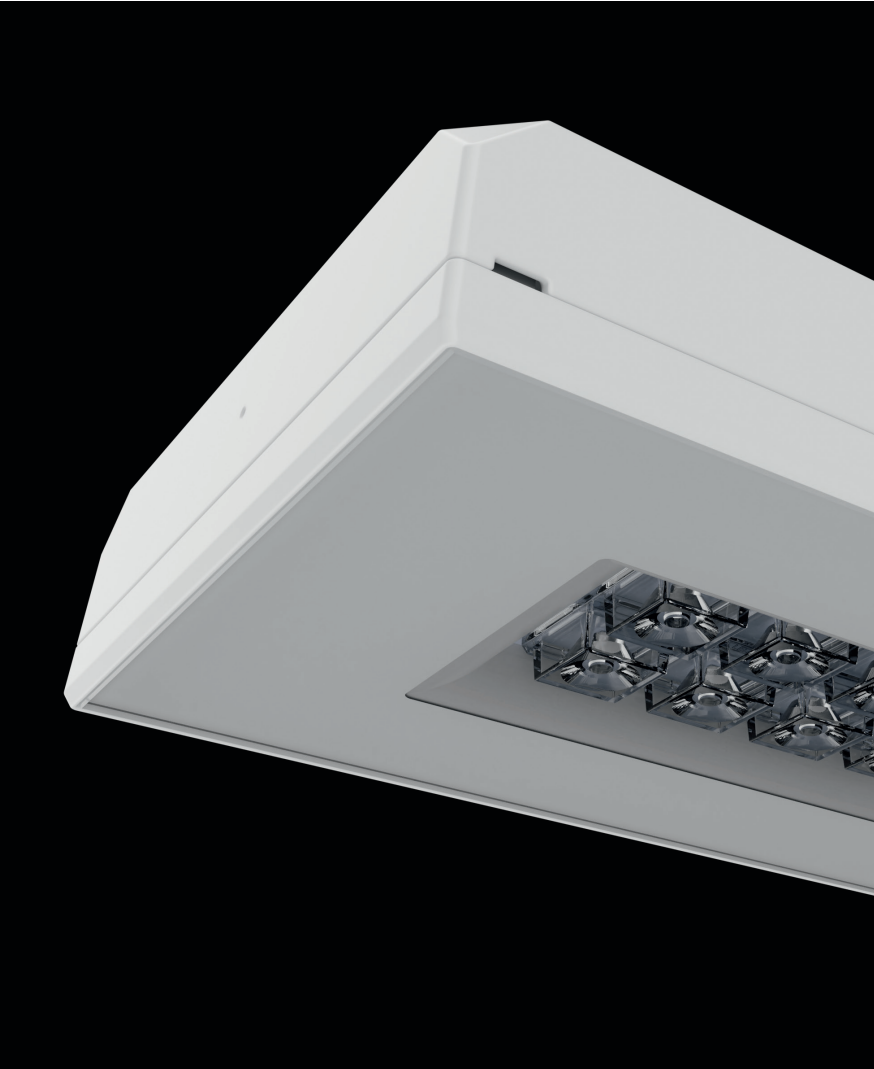

Quality and versality

MX range of emergency light fittings is designed for both: surface and recessed installation. Aluminum body is available in three color variants with ultra modern design.


COLOURS

Black	White	Grey
		
RAL 9005	RAL 9003	RAL 7045

IP CERTIFIED



MX

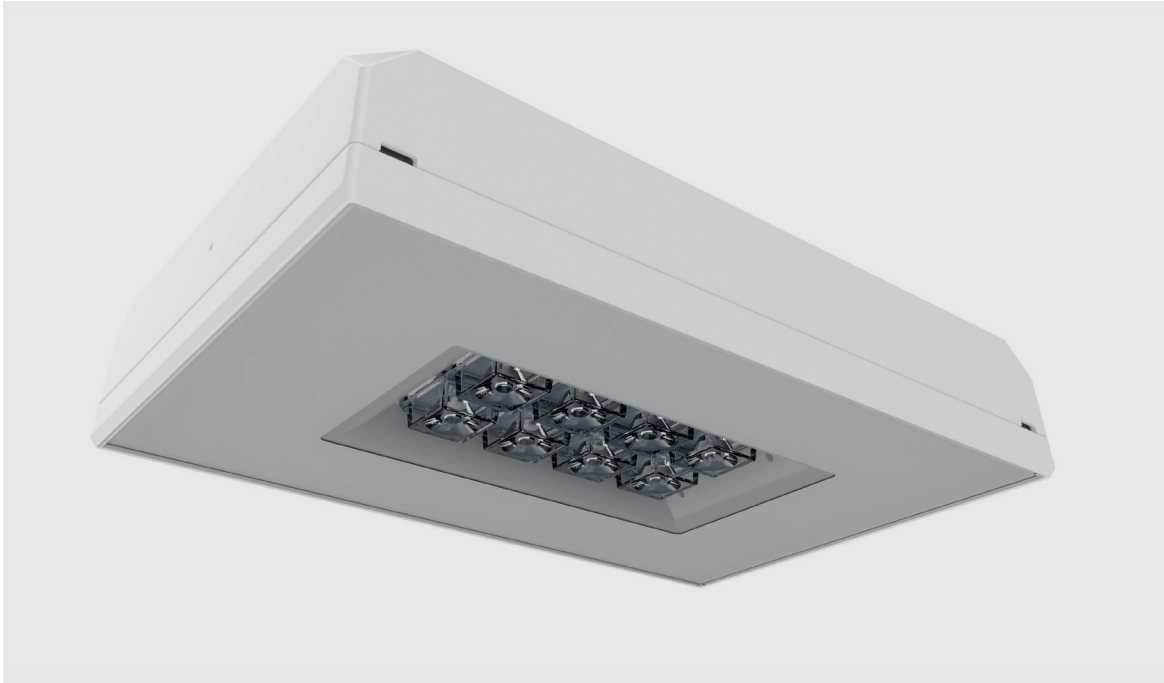


AC
220-240V
50-60Hz

DC
176-275V


LED

IP42

IP65



MATERIALS	Aluminium body painted white, grey or black. Glass cover
MOUNTING	Surface Optionally recessed ¹
POWER SUPPLY	Central battery – 220 - 240VAC/50 - 60Hz; 176 - 275VDC
LIGHT SOURCE	12W, 15W LED Optics: C – corridor • O – open area
INSULATION CLASS	I
IP RATING	IP42 or IP65
AMBIENT TEMPERATURE	t _a : 0°C ÷ 50°C
OPTIONS	CB – central battery
ADDITIONAL INFORMATION	¹ see accessory for recessed mounting
DIMENSIONS [mm]	

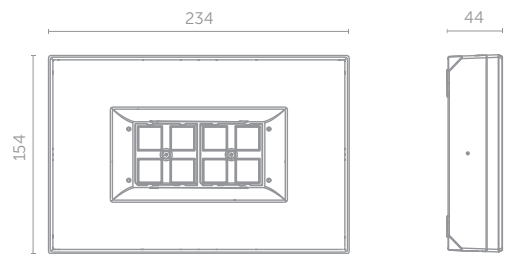

CENTRAL BATTERY CONFIGURATION - NON-ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR		
MXO MXC MX	12W	Z	CB	CBS	X	WH	GR	BL
	15W	Z	CB	CBS	X	WH	GR	BL
MXEO MXEC MXE	12W	Z	CB	CBS	X	WH	GR	BL
	15W	Z	CB	CBS	X	WH	GR	BL

OUTPUT IN EMERGENCY MODE [lm]

POWER	OUTPUT		
	MXO	MXC	MX
12W	1375	1360	1360
15W	2279	2249	2259
12W	1375	1360	1360
15W	2279	2249	2259

CENTRAL BATTERY CONFIGURATION - ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS		COLOR		
MXO MXC MX	12W	Z	CB	ADN	ADS	WH	GR	BL
	15W	Z	CB	ADN	ADS	WH	GR	BL
MXEO MXEC MXE	12W	Z	CB	ADN	ADS	WH	GR	BL
	15W	Z	CB	ADN	ADS	WH	GR	BL


OUTPUT IN EMERGENCY MODE [lm]

POWER	OUTPUT		
	MXO	MXC	MX
12W	1375	1360	1360
15W	2279	2249	2259
12W	1375	1360	1360
15W	2279	2249	2259

LEGEND:



MX	luminaire MX IP65 without optics
MXO	luminaire MX IP65 with optic for open area
MXC	luminaire MX IP65 with optic for escape route
MXE	luminaire MX IP42 without optics
MXEO	luminaire MX IP42 with optic for open area
MXEC	luminaire MX IP42 with optic for escape route
Z	electronic gear for addressable central battery fittings
CB	central battery version
CBS	central battery for circuit monitoring
ADS	address module for CBS 1.0 – SMART technology

ADN	address module for CBS 2.0 – SMART technology
WH	white color
GR	grey color
BL	black color




Optic O for open area

simulation for four luminaires and min 0,5 lx (area)

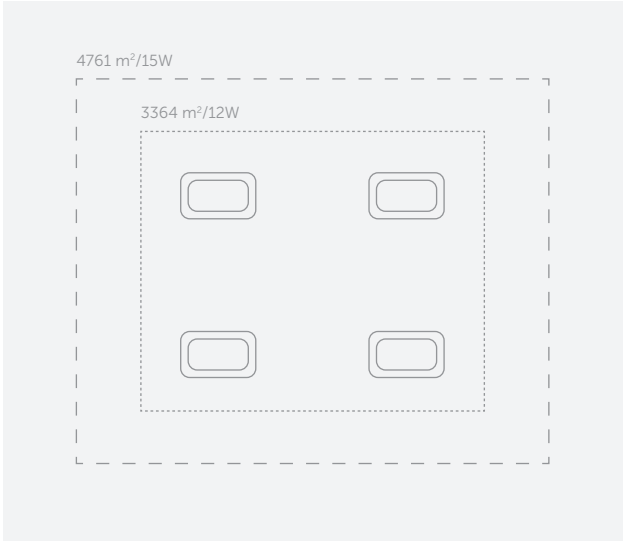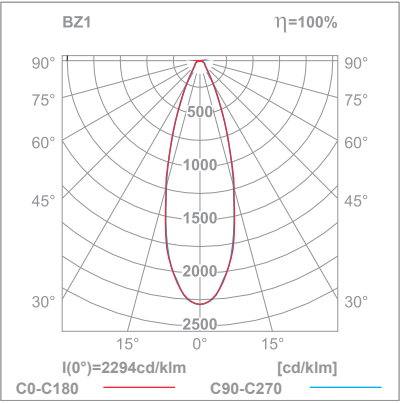

Optic C for escape route

simulation for two luminaires and min 1 lx (distance)

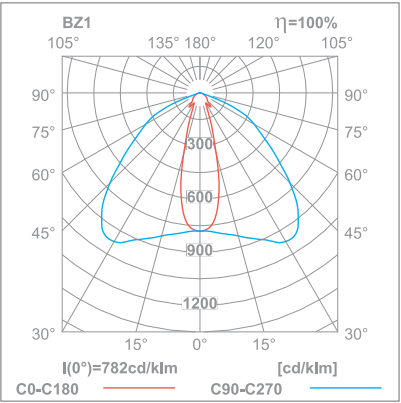


MX accessories



ACCESSORY FOR RECESSED MOUNTING

CODE: MX/REC

DIMENSIONS [mm]

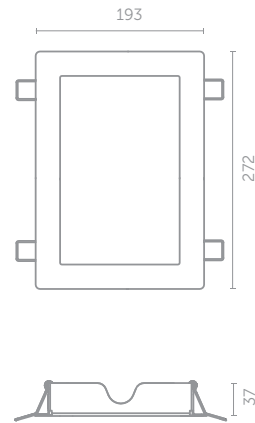

FITS TO MX

